

## Temperature measuring instrument TEMP.MG175830

This handy device displays values between  $-60\text{ }^{\circ}\text{C}$  and  $+1000\text{ }^{\circ}\text{C}$  ( $-75\text{ }^{\circ}\text{F}$  and  $+1830\text{ }^{\circ}\text{F}$ ).

The surface temperature sensor FAG TEMP.MG175830.F that is part of the delivery scope can be used for a measuring range of  $-60\text{ }^{\circ}\text{C}$  to  $+300\text{ }^{\circ}\text{C}$  ( $-75\text{ }^{\circ}\text{F}$  to  $+570\text{ }^{\circ}\text{F}$ ).

The instrument is suitable for temperature measurements on

- rolling bearings, housings and lubricating systems for operation monitoring
- heated rolling bearings and parts to be fitted during mounting

The microprocessor-controlled measuring instrument has a one-line display (digits

are 14 mm high). Its foil keyboard offers the following functions:

- On/Off
- Hold (hold measured value on display)


Additional functions:

- Low Bat display (battery voltage)
- Automatic switch-off (Auto-OFF) after 14 min
- Switching from  $^{\circ}\text{C}$  to  $^{\circ}\text{F}$



## Technical data

Measuring range	-60 to +1000 °C (-75 to +1830 °F)
Resolution	0.1 °C/1 °C (0.1 °F/1 °F) automatic conversion of resolution from 0.1 °C (0.1 °F) to 1 °C (1 °F) from 200 °C (+390 °F) up
Accuracy (±1 digit)	±1 °C (±1.8 °F) ±0.5 % of the measured value (-40 to +900 °C/ -40 to 1650 °F) ±2 °C/±3.6 °F ±1 % of the measured value (remaining range)
Display	LCD, one line, digits 14 mm high
Operating temperature	0 to +40 °C (+32 to +100 °F)
Admissible storage and transport temperature	-20 to +70 °C (-4 to +155 °F)
Housing	plastic (ABS) 190x57x42 mm (LxBxH)
Weight	approx. 300 g
Current supply	battery 9 V IEC 6F 22 or 9-V accumulator
Battery life	>100 h (alkali-mang.)

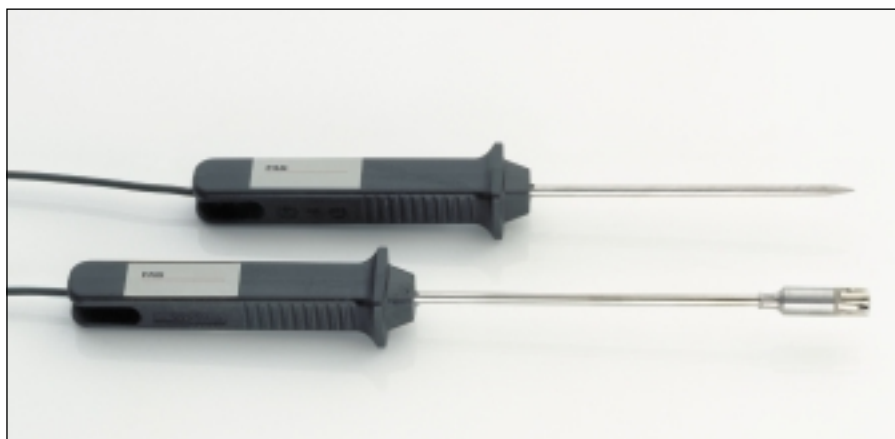

Order designation and delivery scope:

### **TEMP.MG175830**

(measuring instrument with sensor  
TEMP.MG175830.F and service bag)

### **Temperature sensor as spare part**

(can be ordered separately):

Quick-reacting surface sensor

TEMP.MG175830.F

strap sensor (NiCr-Ni thermocouple plug-  
and-socket connection, type K)

Measuring range -60 to +300 °C

(-75 to +570 °F)

briefly up to +500 °C (+930 °F)

Order designation:

**TEMP.MG175830.F**

### **Temperature sensor as accessory**

(can be ordered separately, for temperature  
measuring of fluids, lubricants etc.):

Immersion sensor/stick-in sensor

TEMP.MG175830.TF

(NiCr-Ni thermocouple

plug-and-socket connection, type K)

Measuring range -60 to +400 °C

(-75 to + 750 °F)

Order designation:

**TEMP.MG175830.TF**

## **FAG OEM und Handel AG**

A company of the FAG Kugelfischer Group

P.O. Box 12 60 · D-97419 Schweinfurt

Georg-Schäfer-Straße 30 · D-97421 Schweinfurt

Tel. +49 9721 91 36 91

Fax +49 9721 91 38 09

www.fag.de

Every care has been taken to ensure the correctness of the  
information contained in this publication but no liability  
can be accepted for any errors or omissions. We reserve the  
right to make changes in the interest of technical progress.  
© by FAG 2000. This publication or parts thereof may not  
be reproduced without our permission.

TI No. WL 80-51 E/99/11/00 · Printed in Germany by  
Weppert GmbH & Co. KG, Schweinfurt